

1                   ***AN EMPIRICAL STUDY OF INTER-VEHICLE***  
2                   ***COMMUNICATION PERFORMANCE USING NS-2***  
3

4                   **Jaeyoung Jung**

5                   Ph.D. Candidate

6                   Institute of Transportation Studies

7                   Department of Civil and Environmental Engineering

8                   University of California, Irvine

9                   Irvine, CA 92697-3600 U.S.A

10                  Phone: +1-949-824-5989 / FAX: +1-949-824-8385 / Email: jaeyounj@uci.edu

11

12                  **Rex Chen**

13                  Ph.D. Candidate

14                  Institute of Transportation Studies

15                  Department of Computer Science

16                  University of California, Irvine

17                  Irvine, CA 92697-3600 U.S.A

18                  Phone: +1-949-824-5989 / FAX: +1-949-824-8385 / Email: rex@uci.edu

19

20                  **Wenlong Jin**

21                  Assistant Professor

22                  Institute of Transportation Studies

23                  Department of Civil and Environmental Engineering

24                  University of California, Irvine

25                  Irvine, CA 92697-3600 U.S.A

26                  Phone: +1-949-824-1672 / FAX: +1-949-824-8385 / Email: wjin@uci.edu

27

28                  **R. Jayakrishnan**

29                  Associate Professor

30                  Institute of Transportation Studies

31                  Department of Civil and Environmental Engineering

32                  University of California, Irvine

33                  Irvine, CA 92697-3600 U.S.A

34                  Phone: +1-949-824-2172 / FAX: +1-949-824-8385 / Email: rjayakri@uci.edu

35

36                  **Amelia C. Regan**

37                  Professor

38                  Institute of Transportation Studies

39                  Department of Computer Science

40                  University of California, Irvine

41                  Irvine, CA 92697-3600 U.S.A

42                  Phone: +1-949-824-5156 / FAX: +1-949-824-4163 / Email: aregan@uci.edu

43

44

45                  Submitted for 17th ITS World Congress

46

1  
2  
3  
4  
5  
6  
7  
8  
9  
10  
11  
12  
13  
14  
15  
16  
17  
18  
19

## ABSTRACT

In recent years, there has been increasing interest in inter-vehicle communications (IVC) based on wireless networks to collect and distribute traffic information in various Intelligent Transportation Systems applications. In this paper, we study the performance of IVC under various traffic and communication conditions by means of simulation analysis. We consider impacts of shock waves, transportation network, traffic densities, transmission ranges, and multiple information sources. We used a state-of-the-art communication network simulator ns-2 to measure the probability of success (*success rate*) and *message delivery ratio* (MDR) for flooding-based IVC communication. For reasonable realism in the deployment scenario, we assume that only a partial set of vehicles on the road are equipped with communication devices, according to the market penetration rate. A Monte-Carlo simulation method is used, with repeated random sampling of IVC-equipped vehicles. The results indicate how these parameters can impact the performance of IVC communications. By comparing the flooding-based approach (theoretical and simulation) and simulation results using AODV (Ad Hoc On-Demand Distance Vector), we conclude the importance of traffic environment and network protocol in determining the MDR for IVC communication.

1  
2  
3  
4  
5  
6  
7  
8  
9  
10  
11  
12  
13  
14  
15  
16  
17  
18  
19  
20  
21  
22  
23  
24  
25  
26  
27  
28  
29  
30  
31  
32  
33  
34  
35  
36  
37  
38  
39  
40  
41  
42  
43  
44  
45  
46  
47  
48

## **AN EMPIRICAL STUDY OF INTER-VEHICLE COMMUNICATION PERFORMANCE USING NS-2**

### **INTRODUCTION**

With increasing availability of wireless communication devices, Inter-Vehicle Communications (IVC) is an emerging technology that can help vehicles share or propagate useful information for drivers for traffic congestion mitigation, safety warning, and traffic management. The Federal Communication Commission (FCC) of USA has allocated a spectrum of 75 MHz in 5.9 GHz range for Dedicated Short Range Communications (DSRC) (1). To develop Intelligent Transportation Systems (ITS) strategies based on DSRC and other wireless communication technologies, the US Department of Transportation started the Vehicle Infrastructure Integration (VII) initiative among eight others (USDOT, 2004). In a VII system, vehicles equipped with communication units and road-side stations installed by transportation authorities are able to exchange information with each other through inter-vehicle communication, including vehicle-to-vehicle (V2V) and Vehicle-to-Infrastructure (V2I) communications.

□

As early as in the 1990s, IVC has been used to help drivers respond more promptly to emergencies on a road in the California PATH automatic highway project (2). The Autonet project at University of California, Irvine developed concepts for IVC in the late 90s, which were further studied in a National Science Foundation Project from 2003 (3). In 2002, the CarTalk project in Europe studied Advanced Driver Assistance Systems based on IVC (4).

In recent years, various stakeholders have come together to address these short-term and long-term challenges and initiative efforts have been formed, such as the Europe eSafety and US IntelliDrive programs.

Every year, millions of traffic accidents occur worldwide with forty thousand fatalities in US and Europe alike. A central theme for transportation planners is focused on increasing road safety. The European Transport Policy set the goal to reduce road fatalities by 50% by the year 2010 (5). Furthermore, US DOT's Research and Innovative Technology Administration (RITA) has challenged the industry to reduce traffic crashes by 90% by 2030 (6). As a result, safety related applications with localized information exchange have been an important driving force for the development of IVC.

Since the concept of Carnet (7) and the project of Fleetnet (8) were introduced in 2000, an IVC system has been studied as a special case of mobile ad hoc networks (MANET) and termed as vehicular ad hoc networks (VANET). Thus, an IVC network could develop into a vehicular network (car to car communication) or "Internet on the road" (8), a possible venue for publishing advertisement and infotainment information.

□

In an IVC network, communication nodes, i.e., vehicles equipped with communication units, usually move at high speeds and are constantly entering and leaving roadway segments. In transportation networks, the density of vehicles can vary dramatically due to driving behaviors and restrictions in the network geometry. The network topologies for IVC are highly dynamic (9, 10). The performance of IVC is affected by the underlying transportation network structure and vehicular traffic dynamics as well as the wireless device and communication protocols.

1 There are various performance measures to analyze the effectiveness of communication  
 2 protocols which include: connectivity, capacity, throughput, delivery ratio, end-to-end delay,  
 3 and packet reception rate. In our study, we evaluate the performance of IVC by measuring the  
 4 probability of successful information propagation and packet delivery ratio in uniform and  
 5 shockwave traffic streams in unidirectional roads (one-dimension) and uniform traffic for bi-  
 6 directional roads (two-dimension). We use uniform traffic to compare our simulation results  
 7 with a theoretical model and for consistency in the speed-density relationship. We consider  
 8 the impact of density, transmission range, routing protocol, market penetration rate of  
 9 equipped vehicles, and number of information sources on success rate and message delivery  
 10 ratio (MDR). We define success rate as a probability of success for information to travel  
 11 beyond a certain location and message delivery ratio as the percentage of data packets  
 12 received by the receiver from those transmitted by the information source.

13  
 14 In many studies, communication nodes are assumed to follow a spatial Poisson distribution  
 15 on a plane or to move randomly and independently in a given area. However, in real traffic  
 16 the movement of, and positions of vehicles are not independent of each other. Therefore, the  
 17 aim of this study is to understand the fundamental properties of IVC under different traffic  
 18 and communication scenarios. Since we assume a certain level of market penetration rate of  
 19 equipped vehicles, the Monte Carlo method that randomly selects equipped vehicles via  
 20 Bernoulli trials is used. For network simulation, we use *ns-2 (11)* with realistic  
 21 communication protocol stack based on IEEE 802.11 Medium Access Control with the  
 22 information propagated based on a flooding scheme.

## 24 RELATED WORK

25 The fundamental performance measures in mobile ad hoc networks include multi-hop  
 26 connectivity, information throughput and communication delay (12, 13, 14). Theoretical  
 27 analyses of capacity and throughput of mobile ad hoc networks have revealed that per-node  
 28 capacity drops dramatically with the increase in the number of nodes (15). This has profound  
 29 implications on the scalability of MANETs. Through theoretical (16, 17, 18, 19), simulation-  
 30 based (20, 21), and field studies (22), it has been observed that multi-hop connectivity of an  
 31 IVC system is highly related to the distribution of vehicles on a road, transmission range of  
 32 wireless units, and market penetration rate of equipped vehicles.

33 □

34 As routing protocols in wireless multi-hop ad hoc networks can significantly influence  
 35 communication reliability and reachability (23), various types of routing protocols such as  
 36 unicast, multicast, and broadcast have been studied to evaluate the feasibility and  
 37 performances of ad hoc network on rectangular areas with random waypoint mobility (24, 25).  
 38 Wang *et al.* (26) studied information throughput of inter-vehicle communication in a  
 39 unidirectional uniform traffic stream using AODV (27). Similarly, it is necessary to  
 40 investigate how information propagation in an IVC network is affected by vehicular traffic  
 41 dynamics.

42  
 43 The rest of the paper is organized as follows. First we introduce success rate and message  
 44 delivery ratio as the performance measure of our study. Then, we describe our simulation  
 45 environment and evaluate different mobility patterns and communication scenarios. We  
 46 conclude with insights on the impact of traffic dynamics and network parameters in the  
 47 performance of an IVC system.

## 1 SIMULATION ENVIRONMENT

### 2 THEORETICAL MODEL

3 We first assume that whether a vehicle is equipped with communication capability or not is a  
 4 random occurrence based on a simple market penetration ratio,  $\mu$  and if node  $i$  and  $j$  are  
 5 within transmission range  $R$ , the probability of propagating information is set to 1. Therefore,  
 6 the information propagation from sender to receiver in a traffic stream is a random process,  
 7 and the throughput and message delivery ratio at the receiver depends on the connectivity  
 8 between the sender and the receiver. We denote *the end node probability* for vehicle  $k$  to be  
 9 the end of a communication chain starting from sender  $m$  by  $P(m, k)$  and the probability for  
 10 information to propagate from node  $m$  to node  $k$  by  $c(m, k)$ .  $c(m, k)$  is independent of  
 11 vehicles outside  $[x(m), x(k)]$ , where  $x(m)$  and  $x(k)$  indicate vehicle location.  $u(k)$  and  
 12  $d(k)$  are defined as *upstream reach* and *downstream reach* as the farthest vehicle within its  
 13 transmission range  $R$ , from vehicle  $k$ . Finally, given vehicle positions distributed according  
 14 to uniform or general traffic, the recursive model of multi-hop connectivity can be written as  
 15

$$16 \quad P(m, k) = c(m, k)\mu(k)\prod_{j=k+1}^{d(k)}(1 - \mu(j)),$$

$$17 \quad \text{where, } c(m, k) = 1 - \sum_{i=m}^{u(k)-1} P(m, i)$$

$$18 \quad u(k) = \max \{i | x(k) - x(i) \leq r, x(i) \in [x(m), x(n)]\}$$

$$19 \quad d(k) = \max \{i | x(i) - x(k) \leq r, x(i) \in [x(m), x(n)]\}.$$

20 Further details of the model can be seen in (28).  
 21  
 22  
 23  
 24

### 25 PERFORMANCE MEASURES

26 The approach to measure *success rate* and *message delivery ratio* from an information source  
 27 to an equipped vehicle at location  $x$  is based on the Monte-Carlo method with randomly  
 28 repeated simulation by Bernoulli trials, which is similar to (26). For the Monte-Carlo  
 29 simulation, we generate the mobility patterns of  $K$  vehicles as  $x_k(t)$  and carry out  $M$   
 30 randomly repeated simulations. In each experiment, we have  $K$  independent variables  
 31  $(X_k, k = 0, \dots, K)$  which correspond to vehicles on a given traffic stream. For the Bernoulli  
 32 trials, we generate a random number in  $[0, 1]$  and if  $X_k \leq \mu$ , vehicle  $k$  is IVC equipped.  
 33

□

34 For measurement of *success rate*, we set the most upstream vehicle as an information source  
 35 in uniform traffic, while in shockwave traffic scenario an information source is set at the mid-  
 36 point of two traffic streams with varying densities. The following notations describe the  
 37 *success rate* after  $M$  experiments:  
 38

- 39 •  $D_i$ : Information propagation distance in the  $i_{th}$  simulation ( $i = 0, \dots, M$ )
- 40 •  $I_i(x)$ : Indicator function for message reception at location  $x$  in the  $i_{th}$  simulation

$$41 \quad I_i(x) = \begin{cases} 1 & \text{if } x \leq D_i \\ 0 & \text{if } x > D_i \end{cases}$$

- 42 •  $S(x)$ : Success rate at location  $x$

, ( )

The *message delivery ratio* is defined as the number of received data packets by the receiver divided by the number of transmitted packet by the sender. In flooding, an information source transmits a message to all neighbors within its transmission range. Subsequently, the nearby nodes then transmit the message to their neighbors and finally the message is propagated to all nodes in network. Although the flooding based approach incurs some unnecessary overhead and inefficiencies, it can quickly disseminate information which is especially useful for emergency information propagation and does not require any routing table maintenance or update in the communication design. The following notations describe the *message delivery ratio* in our experiments:

- $T^k$ : Total number of data packets transmitted by a source  $k$
- $R_i^k$ : Total number of data packets received at a receiver  $i$  from a source  $k$
- $MDR^k(i)$ : Message Delivery Ratio at a vehicle  $i$  from a source  $k$

$$MDR^k(i) = \frac{R_i^k}{T^k}$$

## MOBILITY MODELS

We consider two mobility models, uniform traffic and shockwave traffic. For the speed-density relationship, we use the well-known triangular fundamental diagram (29, 30).

$$V(\rho) = \begin{cases} v_f, & 0 \leq \rho \leq \rho_c \\ \frac{\rho_c}{\rho_j - \rho_c} \frac{\rho_j - \rho}{\rho} v_f, & \rho_c \leq \rho \leq \rho_j \end{cases}$$

where  $v_f=104$  km/h,  $\rho_j=150$  veh/km/lane, and  $\rho_c = 0.2\rho_j = 30$  veh/km/lane

In uniform traffic, vehicles are equally spaced on the road and travel at the same speed. The shockwave scenario is created by two traffic streams with varying densities (hence, different speeds according to the triangular relationship) that meet on a unidirectional road.

## SIMULATION FRAMEWORK

We use the network simulator *ns-2*, an open-source object-oriented discrete event simulator. The *ns-2* tool is the most common tool used by computer networking researchers. According to a survey conducted in 2005, *ns-2* is the simulator of choice used by 43% of all published ACM research papers related to mobile ad hoc networks (31).

When a simulation is completed, *ns-2* generates a trace (\*.tr) text file which is then analyzed using a scripting language such as perl and awk. In our study, since every scenario must be simulated repeatedly, we build a Monte-Carlo simulation framework, nsHelper, written in C++. Figure 1 illustrates the sequence of steps in the simulation framework and how the custom-build 2Helper tool facilitates the Monte-Carlo method and the mobility generation, data collection, and gathering of statistics related to the performance measures. A sample screenshot of the visualization output produced by *ns-2* is shown in Figure 2 for a two-dimensional arterial network with 16 intersections.

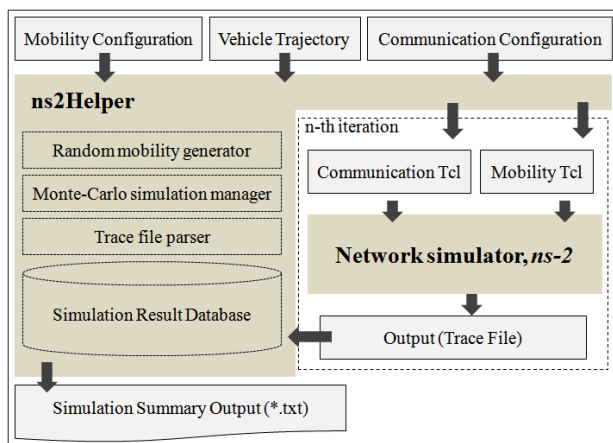


Figure 1. Simulation Framework

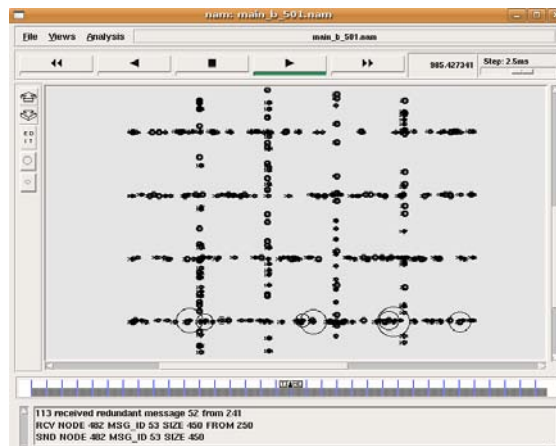



Figure 2. ns-2 simulation

## SUCCESS RATE


In this section, we investigate the *success rate* for both uniform traffic and shockwave traffic by setting one vehicle as an information source, which transmits a single message of 230 bytes and measuring how far the message travels along the traffic stream.

### UNIFORM TRAFFIC

For uniform traffic, we simulate unidirectional uniform traffic stream moving in the same direction with four lanes along a 20 km highway stretch. We set the information source at the most upstream point. For four lanes, the traffic densities are  $\rho_1 = 20$  veh/km and  $\rho_2 = 56$  veh/km, which has 800 and 1200 vehicles traveling at free flow speed ( $v_f = 104$  km/h). We use the Monte-Carlo method ( $M = 500$  times) with different transmission ranges  $R = 0.1, 0.2, 0.5,$  and  $1$  km with 10% market penetration rate ( $\mu = 0.1$ ) of randomly IVC-equipped vehicles in the simulation.

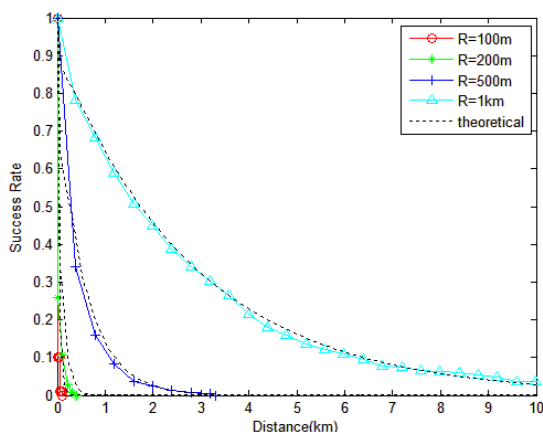

3(a)  $\rho_1 = 20$  veh/km

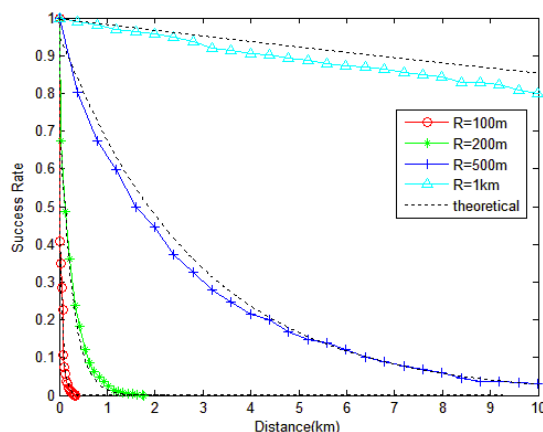

3(b)  $\rho_2 = 56$  veh/km

Figure 3. Success Rate with Uniform Traffic Steam

Figure 3 shows the success rate of a receiver at different locations  $x$  ( $x \in [0,10]$  km) from the sender located at distance 0. The dashed lines indicate theoretical values from an analytical model (15). First, we see that the simulation results are consistent with the analytical model and as the distance from the information source increases, the success rate decreases. Communication performance is strongly affected by vehicle density and transmission range. In Figure 3(a), when  $R = 500$  m, the success rate at 3 km is almost zero, while the success rate

1 at 3 km is more than 0.3 and the message travels more than 10 km according to Figure 3(b).  
 2 When the transmission range is low (i.e. 100 or 200 meters), information cannot propagate  
 3 more than 1 km.  
 4


Transmission range ( $R$ )	Traffic density ( $\rho$ ) and MPR 10 % ( $\mu = 0.1$ )	
	$\rho_1 = 20$ veh/km	$\rho_2 = 56$ veh/km
$R = 0.1$ km	105.6 m	133 m
$R = 0.2$ km	232.22 m	422.30 m
$R = 0.5$ km	873.14 m	2799.66 m
$R = 1.0$ km	3572.72 m	> 20 km

5 **Table 1. Average Information Propagation Distance**

6  
 7 Table 1 illustrates the maximal value of average information propagation distances from the  
 8 information source with the specified transmission ranges and traffic densities. Note that the  
 9 average maximum information propagation distances are generally greater than the  
 10 transmission range. As the message propagation in IVC is multi-hop over multiple vehicles,  
 11 shorter transmission range and low traffic density negatively affects the travel distance in the  
 12 traffic stream.

13 **SHOCKWAVE TRAFFIC**

14 In this section, we examine success rate in shockwave traffic scenarios. Initially, we assume  
 15 that we have capacity flow with  $\rho_u = 30$  veh/km/lane for upstream to  $x = 0$  and congested  
 16 flow  $\rho_d = 40$  veh/km/lane for downstream. Using the speed-density relationship described  
 17 earlier, the corresponding speeds  $v_u = 104$  km/h and  $v_d = 71.5$  km/h are derived respectively.  
 18 At time  $t = 0$ , a shockwave is created and moves backward at speed  $v_s = -26$  km/h. In the  
 19 simulation, we assume the traffic stream length to be more than 80 km with market  
 20 penetration rate 10 % ( $\mu = 0.1$ ) and transmission range  $R = 1$  km. To simulate shockwave  
 21 traffic, we set information source at  $x = -10$  km in the capacity flow, density  $\rho_u = 30$   
 22 veh/km/lane and speed  $v_u = 104$  km/h.  
 23

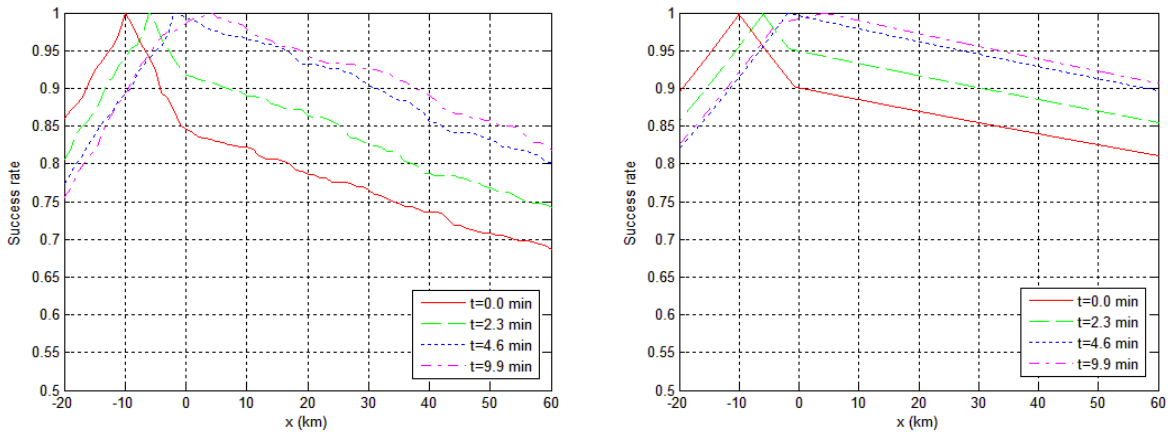

24 **4(a) Flooding** **4(b) Theoretical**  
 25 **Figure 4. Success Rate with Shockwave Traffic Stream**  
 26  
 27

28 Figure 4 shows the success rates in both forward and backward directions at four instants of  
 29 time:  $t_0 = 0$ ,  $t_1 = 2.3$ ,  $t_2 = 4.6$ , and  $t_3 = 9.9$  minutes. In the simulation, the corresponding  
 30 locations of information source are -10 km, -6 km, -2 km, and 4.3 km, and the locations of  
 31 shockwaves are 0 km, -1 km, -2 km, and -4.3 km. We observe that success rate is symmetric  
 32 with respect to information source within the same traffic density. However, it is clear that


1 success rate depends on traffic density and changes dramatically when meeting a different  
 2 traffic density. Comparing Figure 4(a) with 4(b), we see that the analytical and simulation  
 3 results are similar initially, but are significantly different as the distance from the information  
 4 source increases. For example, at location 60 km, the difference in success rates for the case  
 5 of  $t_0 = 0$  is more than 10%. This is attributed to the wireless communication signal  
 6 interference in the simulation while the theoretical model assumes guaranteed message  
 7 delivery within transmission range. Further, the theoretical model assumes that messages are  
 8 directly delivered to the farthest IVC-equipped vehicle (most forward within range) to  
 9 minimize the hop count.

10  
 11 **MESSAGE DELIVERY RATIO**

12 In this section, we evaluate the performance of inter-vehicle communication by measuring  
 13 the message delivery ratio for vehicular network in different traffic densities, number of  
 14 information sources, and two-dimensional road layouts. We set the communication  
 15 bandwidth to 1 Mbps and information source that transmits packets at periodic intervals (0.02  
 16 sec) with a fixed packet size (230 bytes/packet) in the simulation time period (32) over  $M =$   
 17 500 simulation runs.

18 **IMPACT ON ROUTING PROTOCOL**

19 In this experiment, a single information source is set and follows the same communication  
 20 scenario as (26) to compare our flooding-based method with AODV. AODV is a popular on-  
 21 demand routing protocol to deliver messages in MANETs.

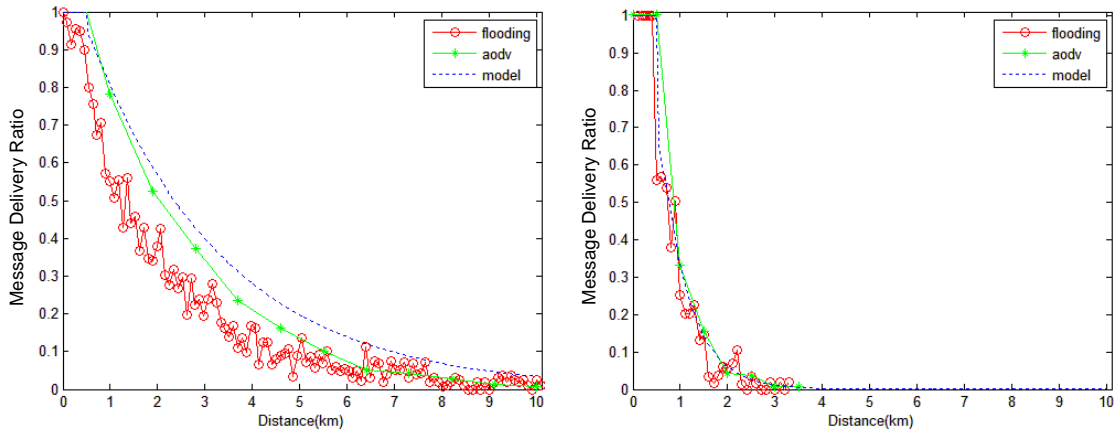


27 **5(a)  $\rho_1 = 56$  veh/km** **5(b)  $\rho_2 = 20$  veh/km**  
 28 **Figure 5. Message Delivery Ratio with  $R = 500$  m,  $\mu = 0.1$**

29 Figure 5 presents message delivery ratio for two different traffic densities with  $R = 500$  m.  
 30 Similar to success rate, the message delivery ratio also decreases as the distance from the  
 31 information source increases. For low traffic density, there is no significant difference  
 32 between flooding, AODV, and theoretical model as shown in Figure 5(b). However, in high  
 33 traffic density, Figure 5(a), degradation of the flooding method is evident in comparison with  
 34 the other methods. The lower message delivery ratio in flooding for higher traffic density is  
 35 caused by the broadcast storm problem where redundant broadcasts cause wireless radio  
 36 contention and collision problems. Further, AODV performed better than the flooding  
 method as AODV establishes a shortest-path-based routing scheme (routing table construct)  
 and then disseminate messages in the MANET. Consequently, we can see that the choice of

1 routing protocols can exhibit different performance measures for the same mobility scenario  
 2 and transmission range.  
 3

#### 4 IMPACT ON MULTIPLE INFORMATION SOURCES


5 This experiment evaluates the overall communication performance when multiple vehicles  
 6 are sending messages simultaneously. We place multiple information sources (up to a  
 7 maximum of four) equally distributed over the same traffic scenario with Figure 5(a) and  
 8 measure the message delivery ratio. Figure 6 compares two different cases, single and four  
 9 information sources. From Figures 6(a) and 6(b), we see the impact of communication traffic  
 10 on delivery distance when multiple information sources are present in the network.  
 11

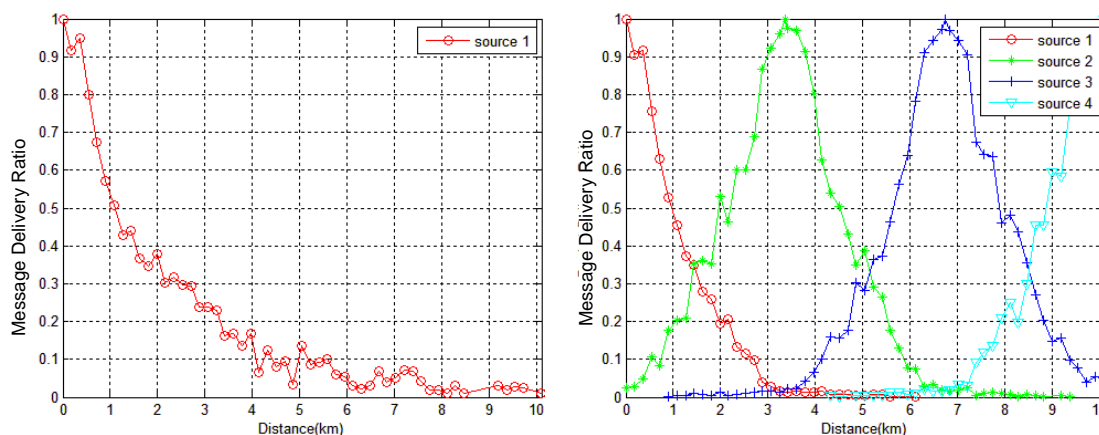

12  
 13 **6(a) Single Information Source** **6(b) Four Information Sources**  
 14 **Figure 6. Message Delivery Ratio with Multiple Sources**

#### 15 IMPACT ON TWO DIMENSIONAL NETWORKS

16 In this section, we construct a two-dimensional network (5 km x 5 km) with traffic flow in  
 17 both forward and opposite directions for uniform traffic to better understand communication  
 18 performance in the intersection junction of arterial road. A fixed value of  $R = 250$  m is used.  
 19 We designate the four longitudinal traffic flows to 30 veh/km and vary the four latitudinal  
 20 traffic flows with 15 veh/km and 60 veh/km in separate experiments. In Figure 7, we observe  
 21 that with a 10% MPR, a density of 15 veh/km can only propagate 1 km (covering 3  
 22 intersections) and 60 veh/km 5 km (covering 12 intersections). This is due, in part that as  
 23 traffic flow meets at an intersection information can be propagated further. Hence, Figure  
 24 7(b) shows significant gains in message distance traveled by doubling the traffic density.  
 25

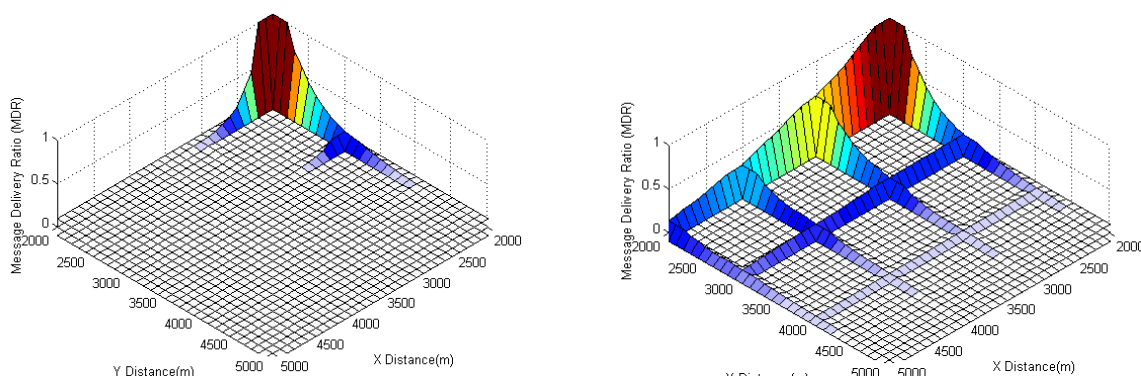

26 **7(a)  $\rho = 15$  veh/km and 30 veh/km** **7(b)  $\rho = 60$  veh/km and 30 veh/km**  
**Figure 7. Two Dimensional Road Network**

1

2 **CONCLUSION**

3 In this paper, we investigate and illustrate the impact of traffic stream and wireless  
 4 communication on the performance of inter-vehicle communications. We develop a  
 5 simulation framework with *ns-2* that generates different combinations of communication and  
 6 mobility scenarios and use the Monte-Carlo method to evaluate system wide performances.

7

8 To measure the performance of IVC, we consider *success rate* and *message delivery ratio*.  
 9 First, we measure *success rate* for both uniform traffic and shockwave traffic. The result  
 10 shows that both traffic density and transmission range are major contributing factors on the  
 11 communication performance. In shockwave traffic scenarios, the success rate changes  
 12 dramatically when it meets a different traffic density. By comparing it with analytical model,  
 13 simulation results are lower than theoretical values due to signal interference and inefficiency  
 14 of the flooding method. Then, we study *message delivery ratio* for different traffic densities,  
 15 transmission ranges, multiple information sources, and two dimensional road layouts. We  
 16 conclude that higher traffic densities and longer transmission range causes greater  
 17 interferences that lead to more packet drops. Both traffic and network can significantly  
 18 impact the performance in inter-vehicle communication.

19

□

20 Systematic consideration of the requirements and constraints imposed by applications,  
 21 communication, and vehicular traffic flow are necessary for communication routing protocol  
 22 design. For example, a mobility model can describe information on vehicle headways, which  
 23 is useful since vehicles need to be within transmission range to communicate. For future  
 24 research, we plan to extend our simulation framework to complex traffic scenarios using  
 25 microscopic traffic simulator such as Paramics. However, a joint approach involving both  
 26 network and traffic simulator can create greater simulation challenges such as time-  
 27 synchronization between the two simulators and ensuring compatibility and portability. Our  
 28 future plans include measuring the performance of IVC for bidirectional directions and delay-  
 29 tolerant network schemes where vehicles “store-carry-forward” messages (33). These issues,  
 30 along with other improvements at the lower levels of the communication protocol stack, will  
 31 be important future research questions related to the design of reliable, scalable, and efficient  
 32 routing protocols for vehicular networks.

33

34 **ACKNOWLEDGEMENT**

35 This research is supported in part by a grant from University of California Transportation  
 36 Center (UCTC).

37

38 **REFERENCES**

- 39 1. “FCC allocates spectrum in 5.9 Ghz range for Intelligent Transportation Systems uses” FCC.  
 40 [http://www.fcc.gov/Bureaus/Engineering\\_Technology/News\\_Releases/1999/nret9006.html](http://www.fcc.gov/Bureaus/Engineering_Technology/News_Releases/1999/nret9006.html).  
 41 Accessed Sep. 26, 2007.
- 42 2. Hedric, J.K, Tomizuka, M., and Varaiya, P. Control issues in automated highway systems. *IEEE*  
 43 *Control Systems Magazine*, Vol. 14, No. 6, 1994, pp. 21-32.
- 44 3. Recker, W. W., Jin, W.-L., Yang, X., and Marca, J. Autonet: Inter-vehicle communication and  
 45 network vehicular traffic. *International Journal of Vehicle Information and Communication*  
 46 *Systems*, Vol. 1(3/4), 2008, pp. 306-319.

- 1 4. "Safe and comfortable driving based upon inter-vehicle communication" CarTALK2000.  
2 <http://www.cartalk2000.net/>. Accessed November 11, 2003.
- 3 5. Commission of the European Communities. European transport policy for 2010: time to decide.  
4 2001.
- 5 6. "Advisory Memo to USDOT #2" [http://www.its.dot.gov/itspac/itspac\\_advmemo2.htm](http://www.its.dot.gov/itspac/itspac_advmemo2.htm).
- 6 7. Morris, R., Jannotti, J., Kaashoek, F., Li, J., and Decouto, D. CarNet: a scalable ad hoc wireless  
7 network system. *Proceeding of the 9th workshop on ACM SIGOPS European workshop: beyond*  
8 *the PC: new challenges for the operating system*, 2000, pp. 61-65.
- 9 8. Internet on the road. Fleetnet. <http://www.fleetnet.de/>. Accessed November 11, 2003.
- 10 9. Rudack, M., Meincke, M., and Lott, M. On the dynamics of ad hoc networks for inter vehicle  
11 communications (IVC). *The 2002 International Conference on Wireless Networks (ICWN'02)*,  
12 Las Vegas, NV, USA, 2002.
- 13 10. Blum, J. J., Eskandarian, A. and Hoffman, L. J. Challenges of intervehicle ad hoc networks. *IEEE*  
14 *Transportations on ITS*, Vol. 5(4), Dec. 2004.
- 15 11. Network Simulator, ns-2. <http://www.isi.edu/nsnam/ns/>. Accessed July 01, 2008.
- 16 12. Shannon, C. E. A mathematical theory of communication. *The Bell System Technical Journal*,  
17 Vol. 27, July, October, 1948, pp. 379-423, 623-656.
- 18 13. Abramson, N. The Throughput of Packet Broadcasting Channels. *Communications, IEEE*  
19 *Transportations on [legacy, pre-1988]*, Vol. 25(1), 1977, pp. 117-128.
- 20 14. Tanenbaum, A. S. Computer Networks. Prentice Hall PTR, 2002.
- 21 15. Gupta, P. and Kumar, P. R. The capacity of wireless networks. *IEEE Transportation on*  
22 *Information Theory*, 46(2), March 2000, pp. 388-404.
- 23 16. Jin, W.-L. and Recker, W. W. An analytical model of multihop connectivity of inter-vehicle  
24 communication systems. Submitted to *IEEE Transportations on Wireless Communications*, 2005.
- 25 17. Jin, W.-L. and Recker, W. W. Instantaneous information propagation in a traffic stream through  
26 inter-vehicle communication. *Transportation Research Part B: Methodological*, Vol. 40(3), 2006,  
27 pp. 230-250.
- 28 18. Jin, W.-L. and Recker, W. W. A Monte Carlo Simulation Model of Instantaneous Inter-Vehicle  
29 Communication. In *Transportation Research Record: Journal of the Transportation Research*  
30 *Board*, No. 2000, Transportation Research Board of the National Academies, Washington, D.D.,  
31 2007, pp. 8-15.
- 32 19. Jin, W.-L., Wang, Z., and Lu, W. A new framework for simulating inter-vehicle communication.  
33 *Third China Annual Conference on Intelligent Transportation*, Nanjing, China, 2007.
- 34 20. Yang, X. Assessment of A Self-Organizing Distributed Traffic Information System: Modeling  
35 and Simulation. PhD thesis, University of California, Irvine, 2003.
- 36 21. Yang, X. and Recker, W. W. Simulation studies of information propagation in a self organizing  
37 distributed traffic information system. *Transportation Research Part C: Emerging Technologies*,  
38 Vol. 13(5-6), 2005, pp. 370-290.
- 39 22. Harmon, T., Marca, J., Klefstad, R. and Martini, P. Design, implementation, and test of a wireless  
40 peer-to-peer network for roadway incident exchange. *International Journal of Vehicle*  
41 *Information and Communication Systems*, 2007.
- 42 23. Viswanath, K. and Obraczka, K. Modeling the Performance of Flooding in Wireless Multi-Hop  
43 Ad Hoc Networks, *Computer Communications*, Vol. 29(8), 2006, pp. 949-956.
- 44 24. Broch J., Maltz, D. A., Johnson, D. B., Hu, Y.-C., and Jetcheva, J. A Performance Comparison of  
45 Multi-Hop Wireless Ad Hoc Network Routing Protocols. *Proceedings of the 4<sup>th</sup> annual*  
46 *ACM/IEEE international conference on Mobile computing and networking*, 1998, pp. 85-97.
- 47 25. Yi, Y., Gerla, M., and Kwon, T. J. Efficient Flooding in Ad hoc Networks: a Comparative  
48 Performance Study. *Communications, 2003. ICC '03. IEEE International Conference on*, Vol. 2,  
49 2003, pp. 1059-1063.
- 50 26. Wang, Z., Lu, W., and Jin, W.-L. A Study on Information Throughput of Inter-vehicle  
51 Communications in a Unidirectional Traffic Stream. *Communications and Mobile Computing*,  
52 *2009. CMC '09. WRI International Conference on*, Vol. 2, 2009, pp. 396-401.
- 53 27. AODV. <http://www.ietf.org/rfc/rfc3561.txt>. Accessed Mar 13, 2008.
- 54 28. Jin, W.-L. Modeling connectivity of inter-vehicle communication networks along discrete traffic  
55 streams. Under review for *IEEE Transactions on Intelligent Transportation Systems*.

- 1 29. Munjal, P. K., Hsu, Y. S., and Lawrence, R. L. Analysis and validation of lane-drop effects of  
2 multilane freeways. *Transportation Research* 5, 1971, pp. 257-266.
- 3 30. Newell, G.F. A simplified theory of kinematic waves in highway traffic I: General theory. II:  
4 Queuing at freeway bottlenecks. III: Multi-destination flows. *Transportation Research Part B*,  
5 Vol. 27, 1993, pp. 281-313.
- 6 31. S. Kurkowski, T. Camp, and M. Colagrosso. Manet simulation studies: the incredibles.  
7 SIGMOBILE Mobile Computer Communication Review. 2005.
- 8 32. AhleHagh, H., Michalson, W. R., and Finkel, D. Statistical characteristics of wireless network  
9 traffic and its impact on ad hoc network performance. *Advanced Simulation Technologies*  
10 *Conference*, Orlando, USA, April 2003, pp. 66-71.
- 11 33. Abdulla, M. and Simon, R. The Impact of the Mobility Model on Delay Tolerant Networking  
12 Performance Analysis. *Simulation Symposium, 2007. ANSS '07. 40<sup>th</sup> Annual*, 2007, pp. 177-184.